


# Lay out of the general design

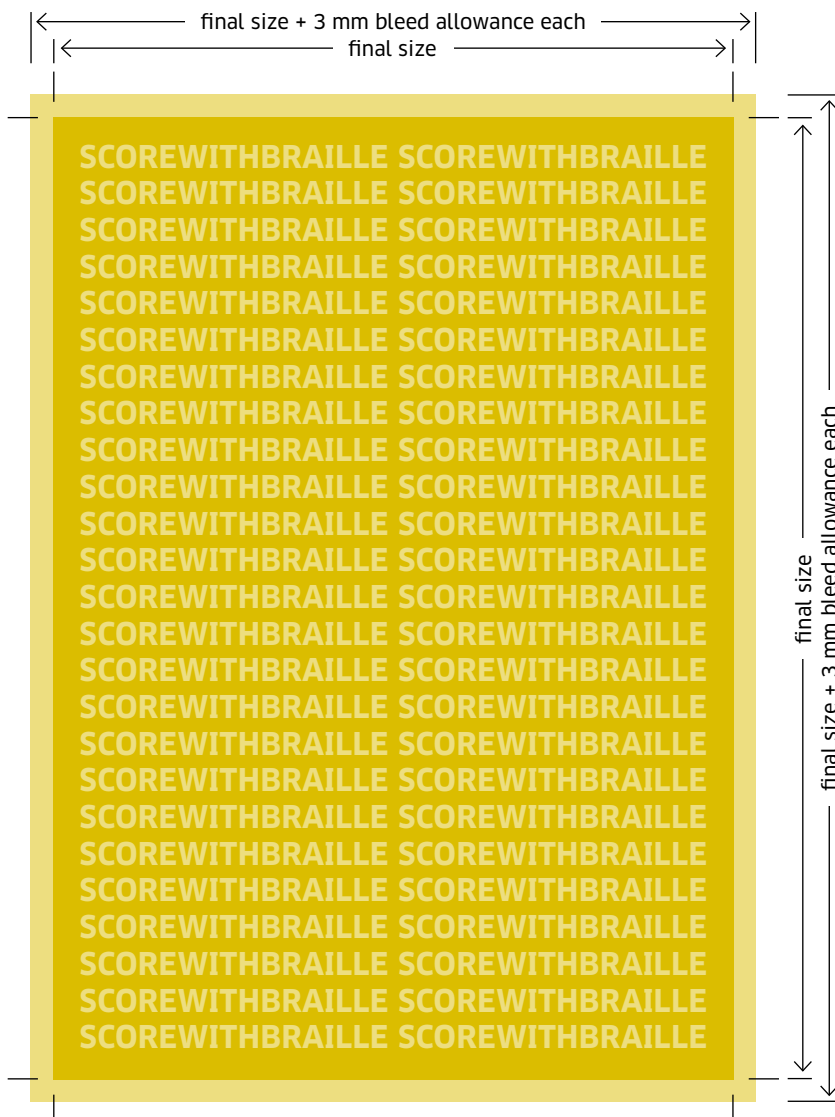

## Create a file with crop marks!


Color profile:  
ISO Coated v2

## Safety clearance general layout:

4 mm each side.

The safety clearance is the distance between the texts/content and the edges of the final size

A sufficient safety clearance prevents the unwanted cutting of layout content.

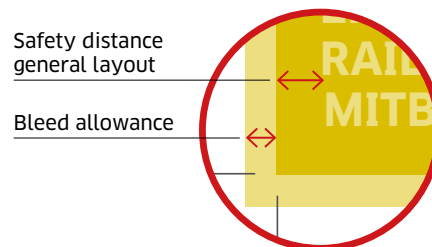


### Please note:

- Adjust bleed allowance and safety clearance as specified.
- Adjust background colors and images or graphics in bleed always with 3 mm bleed allowance.
- During production, by cutting, punching and folding tolerances might occur.



# Lay out of the Braille

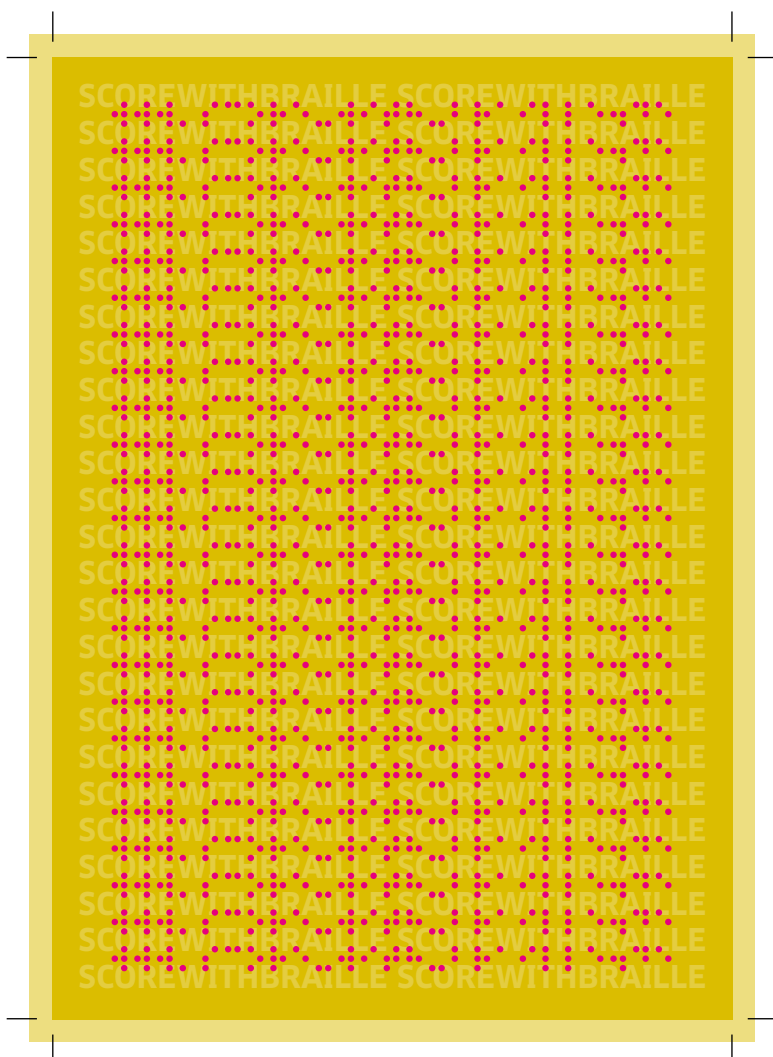


**Adjust the braille  
as a special colour in  
100% magenta.**

Special colour must be set  
to overprint.

label the special colour:  
„Braille“.

diameter of  
the Braille dots: 1.6 mm

**Safety clearance  
Braille to the edge:**  
at least 8 mm each.

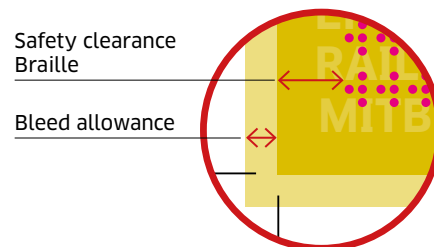

**i Do you need help with the typesetting  
or proof-reading of Braille texts?  
We are happy to offer you these duties  
as a separate service.**

